


# RS-390A

APPLICATIONS: Electric Screwdriver, Vacuum Cleaner, Small Electric Generator, Home Medical Equipment, Popcorn Machine.

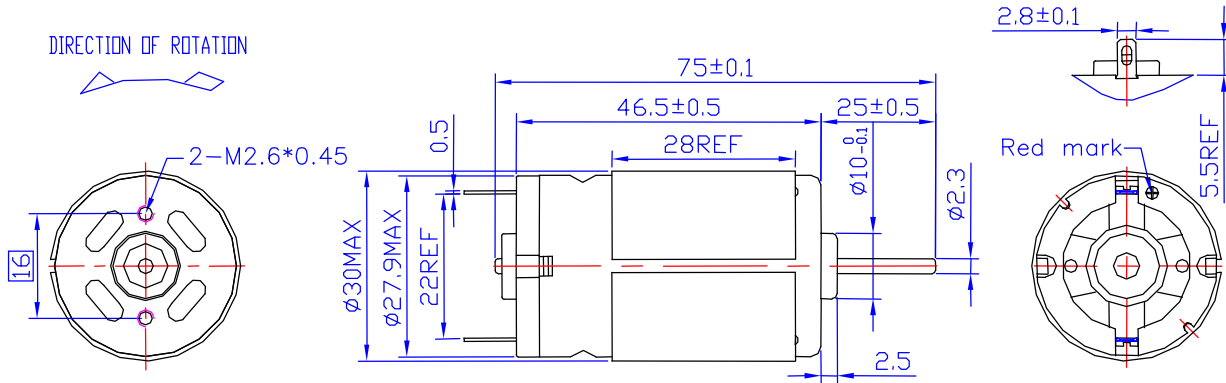

WEIGHT: 89g (APPROX)

型号 MODEL	输入电压 VOLTAGE		空载 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY					堵转 AT STALL	
	电压范围 RANGE	额定电压 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	力矩 TORQUE	输出 OUTPUT	效率 EFF	电流 CURRENT	力矩 TORQUE
	V	V	rpm	A	rpm	A	g-cm	w	%	A	g-cm
RS-390PA-5127R	3.0-12.0	6.0 CONST	15100	0.65	12896	3.81	128	16.94	74.97	22.28	974
RS-390PA-25125R	3.0-18.0	12.0 CONST	7690	0.37	5698	1.3	201	12.31	78.91	4.50	898
RS-390PA-20185	3.0-18.0	12.0 CONST	4875	0.10	3884	0.49	101	4.02	68.37	1.94	498
RS-390PA-21135	3.0-18.0	12.0 CONST	6142	0.10	5156	0.55	93	4.92	74.55	2.85	580
RS-390PA-5128	3.0-9.0	6.0 CONST	16080	0.62	13762	3.71	116	16.38	73.58	22.06	805