



TAHO

www.chintaho.com.tw

FM wireless black box spot wiretap transmitter


Model No.: WT-FM8708T-SP




Function..

- The frequency of the transmitter is optional from 87MHz-108 MHz,
- Adjust the frequency to the available channel without interference in the local country as the customers' requirement.
- Work with any other FM receiver at the same frequency to be as FM wireless spot monitor.
- Low power consumption, work in 1.5V azoth battery.
- It will be better to adjust the frequency without any interfering.

Guide..

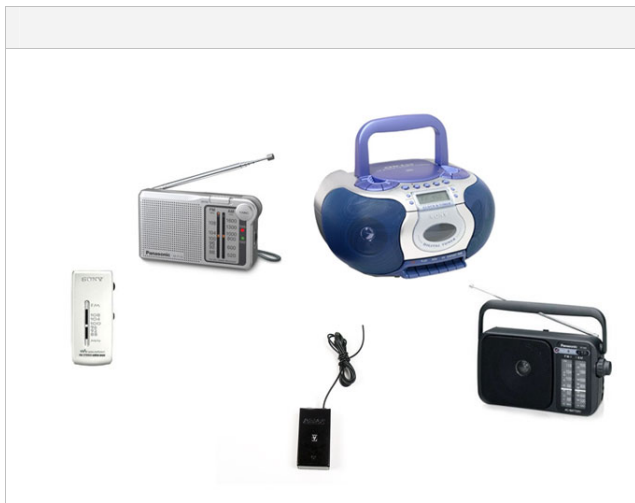

Support any kind of Radio

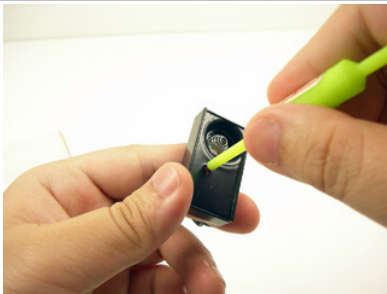


Adjust frequency

Specification..

Transmitter	
Frequency range	87MHz-108 MHz
Transmitting Power	15mW
Adjustable width	WFM +/- 75KHz
Transmission distance	Sea level 200m
Battery	1.5V azoth battery
Penetrability	5 paths cement wall
Power consumption	10mA at stand by mode
Microphone range	Radii 5M
Working temperature	-15°C -50°C
Dimension	21x40x11mm

Complete set..

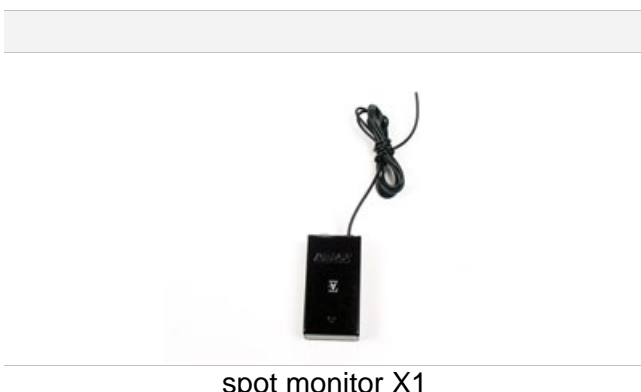

spot monitor X1

