

# Speed Dome Camera Controller

Products List > D Series > Speed Dome Camera > Speed Dome Camera Controller > MCU-PTZ031


## MCU-PTZ031

### FEATURES



### MCU-PTZ031

- ◆ RS485/232 Communication
- ◆ Variable PTZ Speed
- ◆ Easy & Simple Installation

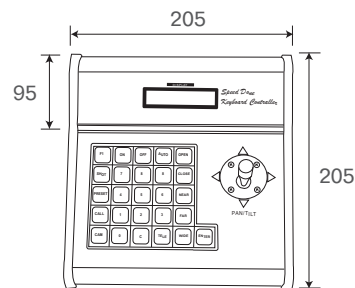

Tol: ±0.5 Unit:mm

### SPECIFICATIONS

MCU-PTZ031	
Power Supply	12Vdc, 900mA
Output Control	Maximum 32 Speed dome cameras or receivers
Function Display	LED
Keys and Joystick	Switch Keys: ON, OFF Number Keys: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, Enter Camera Control: Joystick Pan-tilt (Variable Speed) OPEN, CLOSE, AUTO, FAR, NEAR, WIDE, TELE Function Keys: SHOT, PRESET, CALL, TIME, CAM Special Function Key: F1
Camera Interface	RJ45
Communication Port	RS485 / PC RS232
Transmit Speed	1400bps, 4800bps, 9600bps, 19200bps
Communication Distance	1.2 KM
Preset Position	128
Cruising Track	6
Dimensions (WxHxD)	205(W)x95(H)x205(D)mm
Operation Temperature	-10°C~50°C
Operation Humidity	Maximum:RH80% ; RH90%
Storage Temperature	-20°C~60°C
Weight	1.2Kg

