


SPECIFICATIONS

MODEL	ZGA32Y380-46-06157	RATED VOLTAGE	DC 6 V
--------------	--------------------	----------------------	--------

OUTLINE

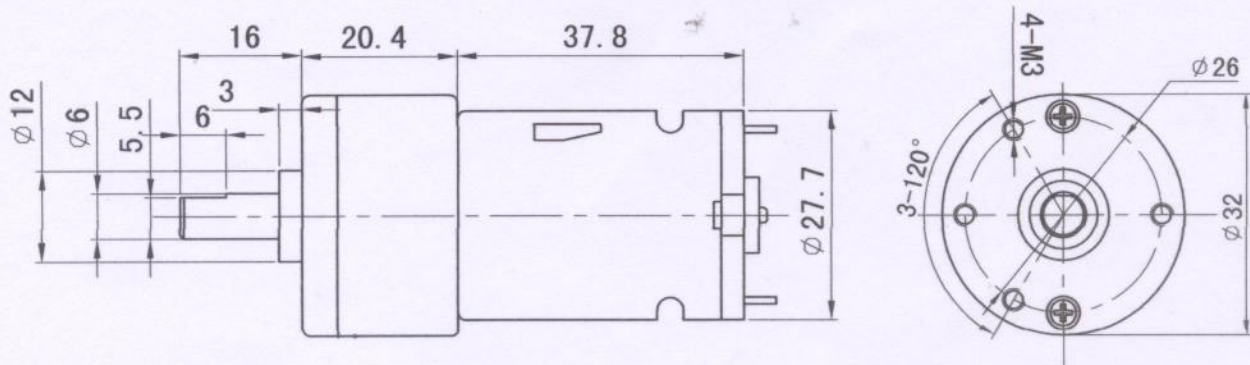

电压 VOLTAGE	空 载 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY				
	电 流 CURRENT	转 速 SPEED	电 流 CURRENT	转 速 SPEED	力 矩 TORQUE	功 率 OUTPUT	效 率 EFF
V	A	rpm	A	rpm	Kg. cm	W	%
6	0.378	157	1.05	135	2.0	2.77	44.0

REFERENCE CHARACTERISTICS

1. DIRECTION OF ROTATION: ANTI-CLOCKWISE WHEN VIEWING MOTOR OUTPUT SIDE WITH POSITIVE VOLTAGE APPLIED TO POSITIVE TERMINAL
2. NO LOAD: CURRENT: $\leq 0.45A$
3. NO LOAD: SPEED: $157RPM \pm 10\%$
4. MOTOR END PLAY: $\leq 0.5 \text{ MM}$
5. OPERATING TEMPERATURE RANGE: $-10^\circ\text{C} \sim +60^\circ\text{C}$
6. OPERATING HUMIDITY RANGE: 20%~90%
7. GO WITH MOTOR RANGE: RS-380SH-2975-51

CUSTOMER APPROVAL:

PREPARED BY	APPROVED BY	DATE	2005. 11. 25
-------------	-------------	------	--------------