
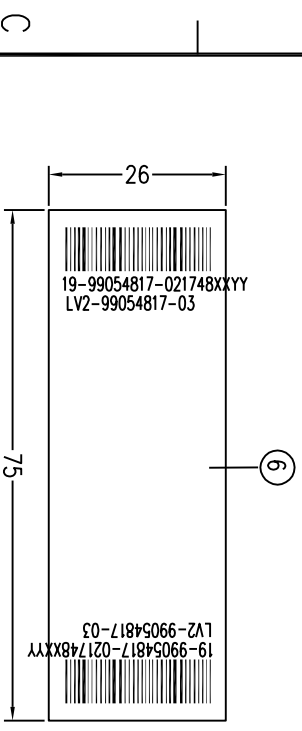


T/NO.	T1:085	T2:037	T3:038
-------	--------	--------	--------

REV	DESCRIPTION	DATE	APPROVED

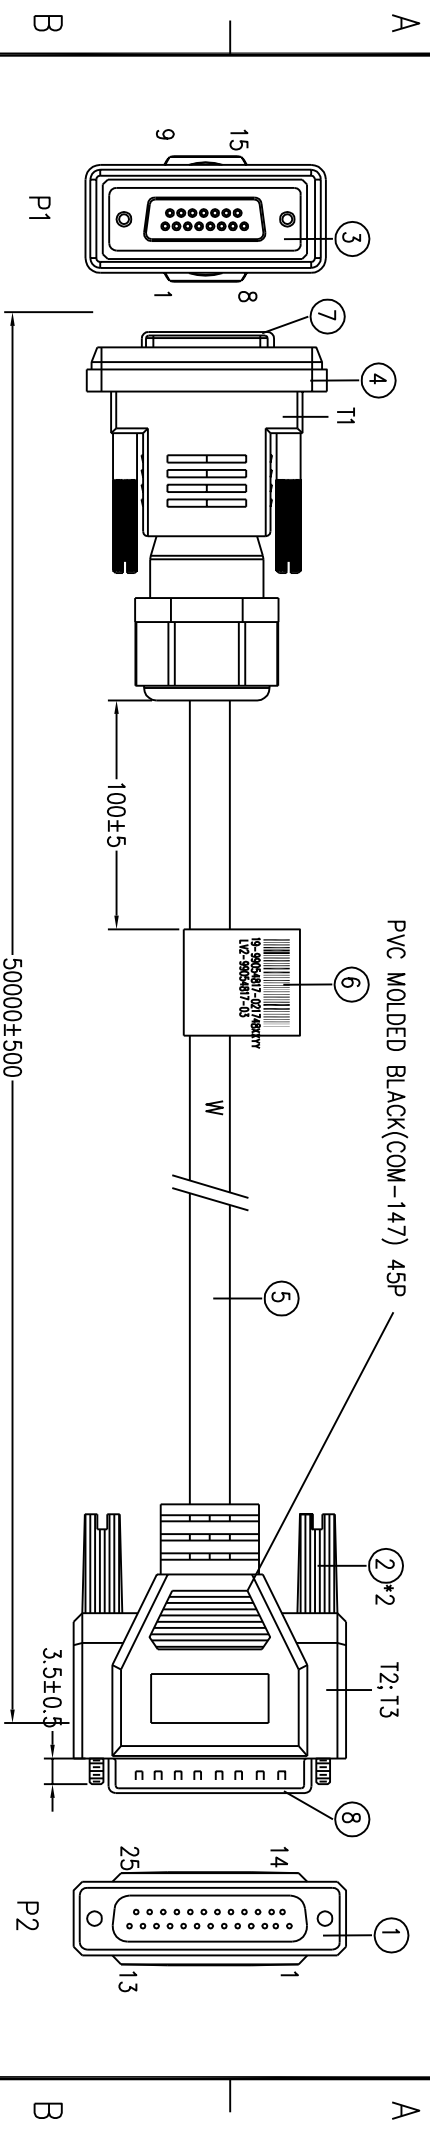

SPECIFICATION

- 1.D-SUB: 25PIN MALE SOLDER STARCONN P/N: 923D25-6B3000 Q'TY 1
- 2.SCREW: #4-40UNC ABS MOLDED BLACK(COM-147) L=33mm big E Q'TY 2
- 3.D-SUB: 15PIN(7+8) FEMALE SOLDER STARCONN P/N: 923C15-6B0000 Q'TY 1
- 4.Waterproof plastic shell: Black SCREW UNC4-40, Suitably 15PIN(7+8) Suitably Cable 7~10mm Q'TY 1
- 5.CABLE: 100±15ohm CAT5E SFTP 24AWG 8P BLACK(COM-147) L=50000mm Q'TY 1
- 6.BAR CODE: WHITE BACKGROUND WITH BLACK CHARACTER Q'TY 1
- 7.DUSTPROOF COVER: TRANSPARENT PVC MOLDED USED FOR D-SUB15P FEMALE Q'TY 1
- 8.DUSTPROOF COVER: TRANSPARENT PVC MOLDED USED FOR D-SUB25P MALE Q'TY 1

WIRE LIST

Cable	P1	P2	Color	pair
7	1	1	brown	pair
8	14	14	red/brown	pair
7	1	1	blue	pair
8	14	14	white/blue	pair
3	11	11	brown	pair
11	10	10	white/brown	pair
4	13	13	orange	pair
12	12	12	red/orange	pair
5	7	7	green	pair
13	6	6	red/green	pair
6	9	9	blue	pair
14	8	8	red/blue	pair
1	2	2	orange	pair
9	3	3	white/orange	pair
2	4	4	green	pair
10	5	5	white/green	pair
shell	shell	shell	braid	

		ELECTRONICS CO.LTD S.		TITLE	
		DRAWN BY Zhiyu.yu		SS ODU&AC/DC CABLE ASSEMBLY	
DATE 07/25/2006		DATE		PART NUMBER 99054817-03	
CHECKED BY		DATE		DRAWING NUMBER	
APPROVED BY		DATE		TOLERANCES UNLESS NOTED:	
SCALE: mm		UNITS: mm		PROJECTION:	
SCALE: NONE		REV: A0		SIZE: A4	
SHEET: 1/1					

1 2 3 4 5 6