

BATTERY

Utilizing the state of art Oxygen Recombination technology, EAST employs several years of experience in the design and manufacturing of high quality NP and GM series Valve-Regulated Lead-Acid batteries. Better quality and excellent features have been widely recognized by customers. Fully sealed structure, long lifespan, reliable quality and better services will make it more convenient for use.



Key Features:





- Complete maintenance-free
- No Leakage
- Wide operating temperature range (-35°C~45°C)
- Longer life (NP series up to 3-5 years, GM series up to 15 years)
- Low self-discharge
- Charging batteries in wet-charge state
- Prevention of explosion

Applications:

- Electronic equipment
- Communication equipment
- Emergency lighting system
- Solar powered system
- Alarm system
- Medical equipment
- Control equipment
- Fire & security system
- UPS



GENERAL CHARACTERISTICS

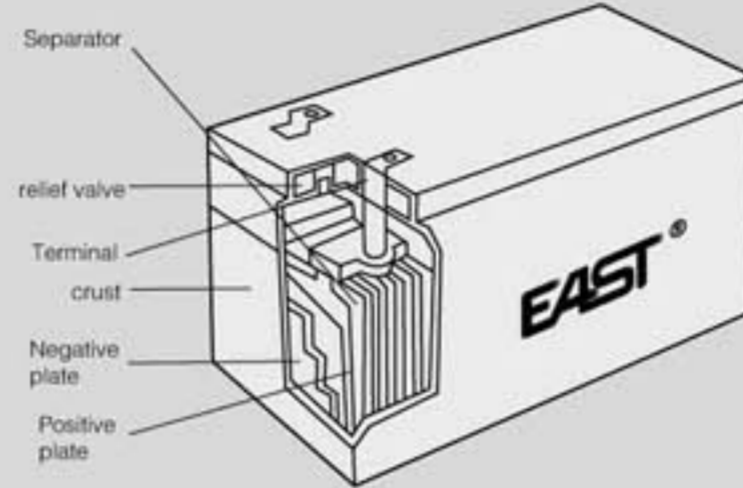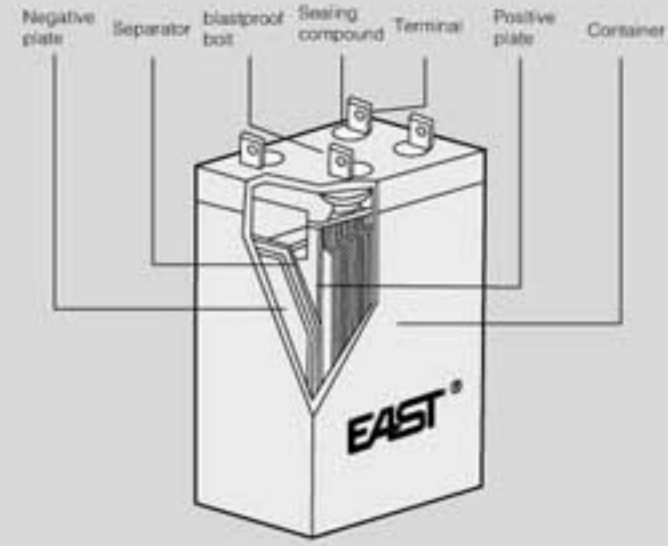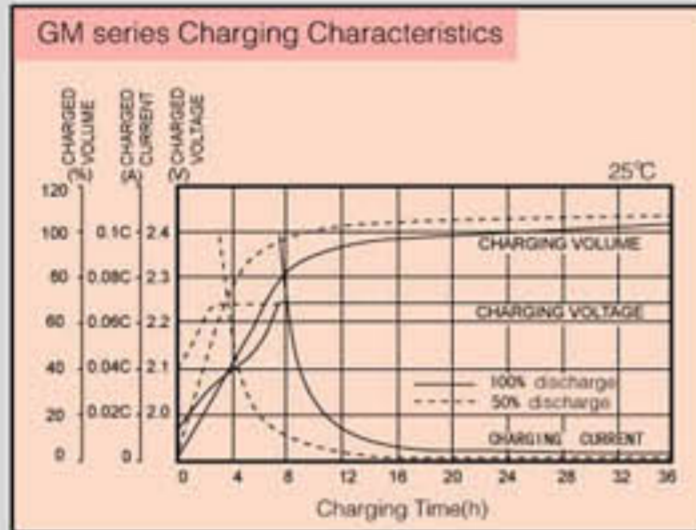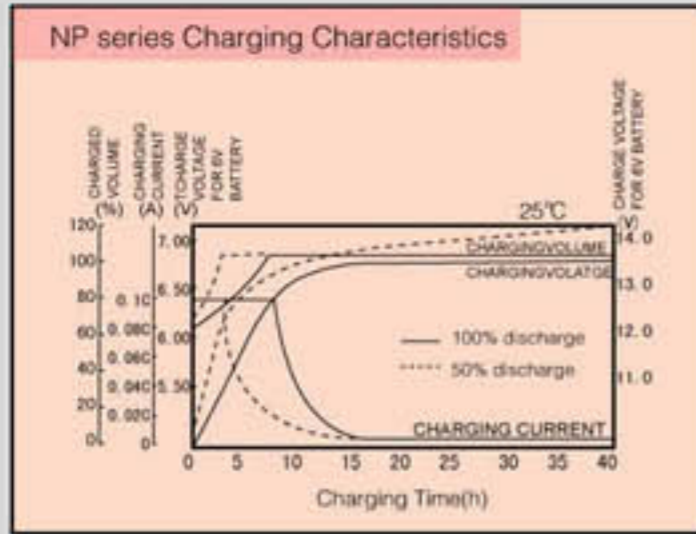

Specifications

Model	Rated Voltage (V)	Rated Capacity 25° (AH)		Measurement(mm)				Weight (KG)
		20HR 1.75V/CELL	10HR 1.75V/CELL	L	W	H	Total Height	
NP Series								
NP1.2-6	6	1.3	1.17	97	24	52	58	0.31
NP4.5-6	6	4.6	4.14	70	47	101	107	0.80
NP8.5-6	6	9.0	8.10	98	56	117	117	1.8
NP10-6	6	10.5	9.45	151	50	94	100	1.85
NP4.5-12	12	4.6	4.14	90	70	101	107	1.72
NP7-12	12	7.7	6.48	151	65	95	101	2.38
NP8-12	12	8.0	7.2	151	65	95	101	2.4
NP9-12	12	9.0	8.1	151	65	95	101	2.8
NP12-12	12	12.0	18.9	151	98	94	101	4.1
NP17-12	12	17	15.8	181	76	167	167	6
NP24-12	12	24	22	166	175	125	125	8.5
NP38-12	12	38	35	197	165	170	170	13.3
NP65-12	12	65	60	350	166	174	174	22.7
NP100-12	12	100	93	330	170	215	243	31.5
NP120-12	12	120	110	405	175	210	240	37
NP150-12	12	150	139	480	170	240	240	48
NP200-12	12	200	186	524	240	216	244	65
GM Series								
GM150	2	150	98	172	110	330	365	13
GM200	2	200	130	172	110	330	365	15
GM300	2	300	195	172	150	330	365	21
GM500	2	500	325	240	172	330	365	34
GM600	2	600	390	300	175	330	365	45
GM800	2	800	520	410	175	330	365	60
GM1000	2	1000	650	475	175	330	365	73
GM1500	2	1500	975	400	350	343	378	115
GM2000	2	2000	1300	490	350	343	383	138
GM3000	2	3000	1900	712	353	340	383	215

- ◆ All specifications subject to change without notice.
- ◆ Custom-made specifications are acceptable.

GUANGDONG EAST POWER CO., LTD

SOUTH SITE :Daping Industrial Zone,
Tangxia Town,Dongguan City,Guangdong
Province China 523722
Tel:0086-0769-7883900
Sale Tel: 0086-0769-7942695
Fax:0086-0769-7920552
Http://www.eastups.com

YANGZHOU SITE:Hanjiang Industrial
Zone,Yangzhou City,Jiangsu Province
China 225009
Tel:0086-0514-7842512 7843347
Sale Tel: 0086-0514-7841580
Fax:0086-0514-7841740
Email: eastups@eastups.com

